



# ProLED-MINI-3W-CC070

Professional Led Modules; **3-15cm** 3D letters, lightboxes



## ■ Features:

- luminous efficacy 100 lm/W
- for indoor and outdoor use
- 50 pcs in chain



UK  
CA

CE

## TECHNICAL DETAILS



MODEL	ProLED-MINI-2W-CC070
Supply voltage	12V DC
Power consumption per module	0.72W
Chain power consumption	36W
Current consumption per module	60mA
LED diodes	LumiLEDS - 2835
Quantity of LEDs	3
Light color	White (~7000K)
Luminous flux	72lm
Luminous flux density	100lm/W
Color rendering index - CRI	≥80
Beam angle	140°
Current stabilization	No
Dimming	Yes
Module dimensions (L x W x H)	31 x 8 x 8mm
Cable length	69mm
Number of modules in 1m	10
Box weight	17kg
Packing	Chain – 50pcs / Bag – 200pcs / Box – 5000pcs
Montage	Adhesive tape / mounting screw
Lifetime	L70B50 > 50000h
Working temperature	-25°C ÷ 55°C
IP protection	IP67
Warranty	7 years




# ProLED-MINI-3W-CC070



Professional Led Modules; **3-15cm** 3D letters, lightboxes

## Dimensions

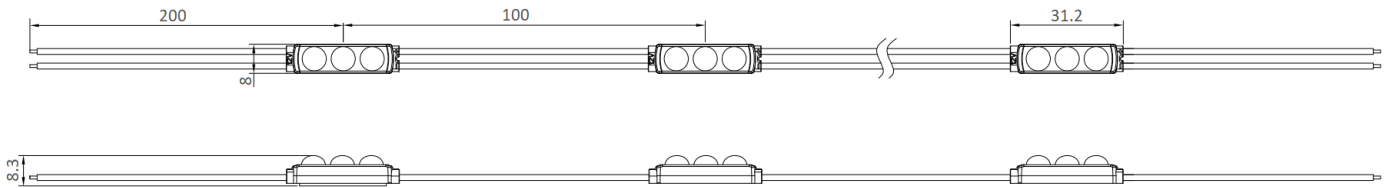

## Connection diagram

**One-side power input:**



**Maximum number of modules 50 pcs**

**Two-side power input:**




**Maximum number of modules 100 pcs**


It is acceptable to connect multiple chains in parallel, as long as the power supply provides sufficient power

## Light color / CCT

**Light color**

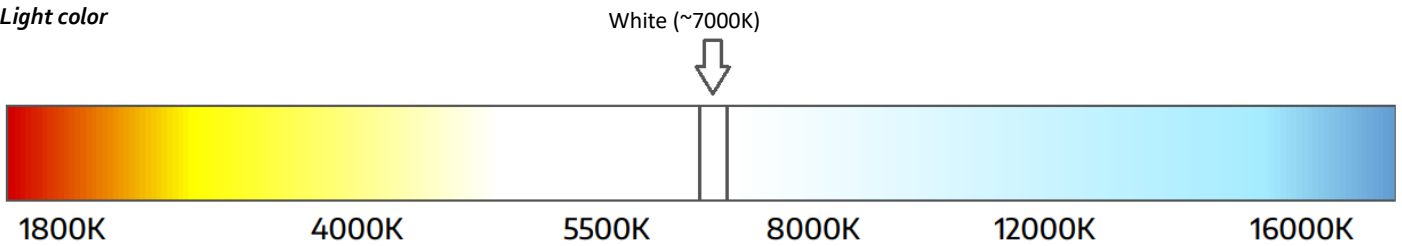


## Packing



Chain  
**50 pcs**



Bag  
**200 pcs**



Box  
**5000 pcs**




# ProLED-MINI-3W-CC070

Professional Led Modules; **3-15cm** 3D letters, lightboxes



## Beam angle

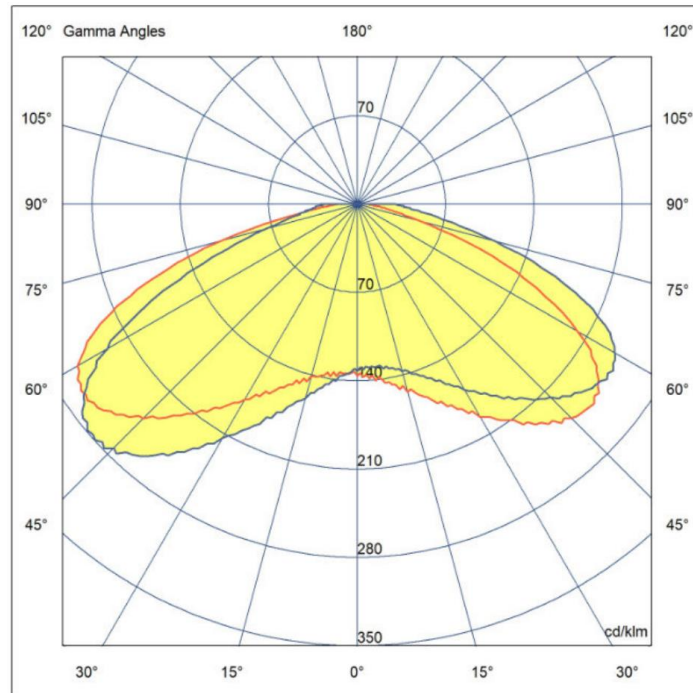

## Energy label

**ENERG**  
MW LIGHTING  
ProLED-MINI-3W-CC100 v.2

A  
B  
C  
D  
E  
F  
G

**F**

**1**  
kWh/1000h

2019/2015