



APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_





Rev	AWO #	Description	Date	Apr
-		RELEASED	7/20/16	

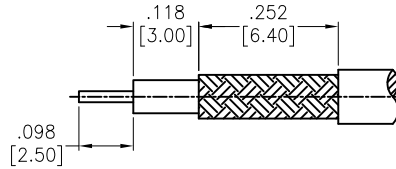

RECOMMENDED CABLE STRIPPING DIMS



RECOMMENDED MOUNTING HOLE

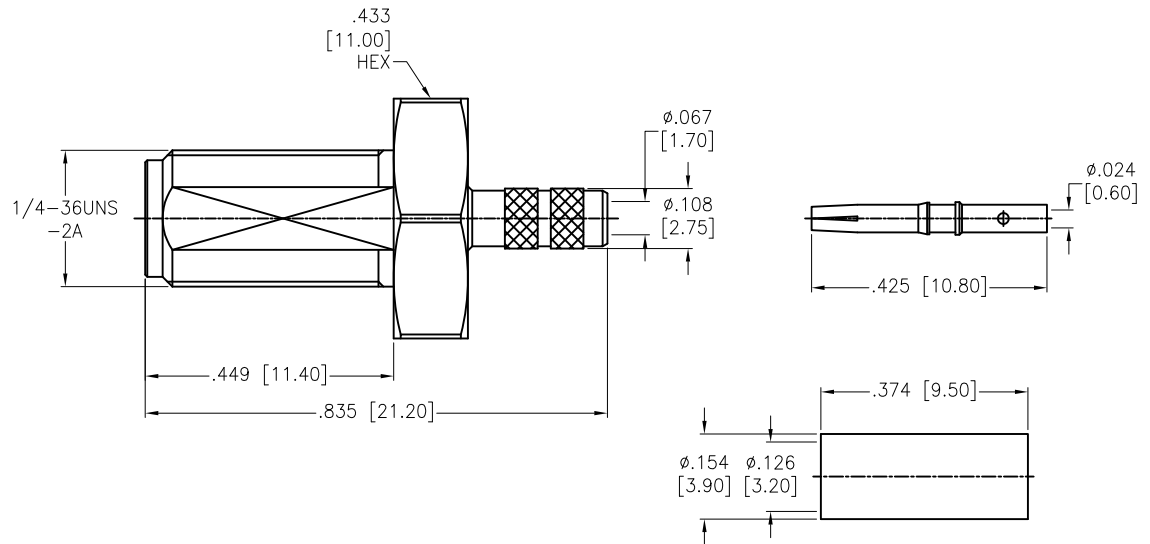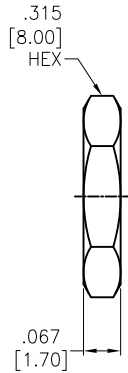

HEX NUT	BRASS	GOLD
WASHER	BRASS	GOLD
O-RING	SILICONE	RED
FERRULE	BRASS	GOLD
CONTACT PIN	BRASS	GOLD
INSULATOR	PTFE	WHITE
BURREL	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

**SPECIFICATIONS:**

Electrical:  
 Frequency range: DC-6 GHz  
 Nominal Impedance: 50 Ohms  
 Working Voltage: 250 VOLTS max  
 Proof Voltage: 750 VOLTS  
 VSWR : 1.3 Max @ 1 GHz  
 Temperature Rating:  
 Operating temperature: -65°C to +165°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		<b>ADAM TECH</b> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES			
.X ± .10	∅X ± .10	TITLE <b>RF CONNECTOR, SMA JACK STR BULKHEAD</b> <b>RG-174/U, 316/U, LMR-100</b>	
.XX ± .020	∅XX ± .015		
.XXX ± .015	∅XXX ± .010		
APPROVALS		DATE	
DRAWN	AY	7/20/16	
CHECKED	SY	7/20/16	
APPROVED			
SIZE	PART NO.	REV.	
X	RF2-06A-T-02-50-G	-	
REF: S00277T	SCALE: NTS	SHEET 1 OF 1	