

5mm SMD 3535 RGBW Addressable LED strip 60LEDs/m



◆ Product Description :


This SMD3535 RGBW addressable led strip with 60 LEDs & 60Pixels per meter, each LED can be controlled individually
Compared with RGB led strip , there are one more white color, more lighting effects for us
The color(CCT) of white can be warm white, nature white, pure white and cold white
Colors are rich and varied, it can realize different changing effects by the controller
5mm width, suitable for installation in narrow space
Easy and free cutting and welding: you can cut and weld all kinds of length according to the above cutting mark



◆ Product Datasheet

Product Number	S005060DA4SA1	Luminance/M	R: 46 G: 156 B: 34 W:409lm
Operating Voltage	DC5V	Ra	/
Power/M	14.4W	Beam Angle	120°
SMD Type	SMD 3535	Size (mm)	5000 * 5mm
LED Qty/M	60	IP Rate	IP20/IP65
Color	RGBW: 3000K/4000K/6500K	Operation Temperature	- 25 ~ 60 °C
Pixel/M	60	Material	FPC
Control	SPI/SK6812	Cutting Length	16.67mm
Wavelength	R:620-625 G:520-525 B:460-465nm	Net Weight/Roll	0.13KG

◆ Outline Dimension (unit: mm)

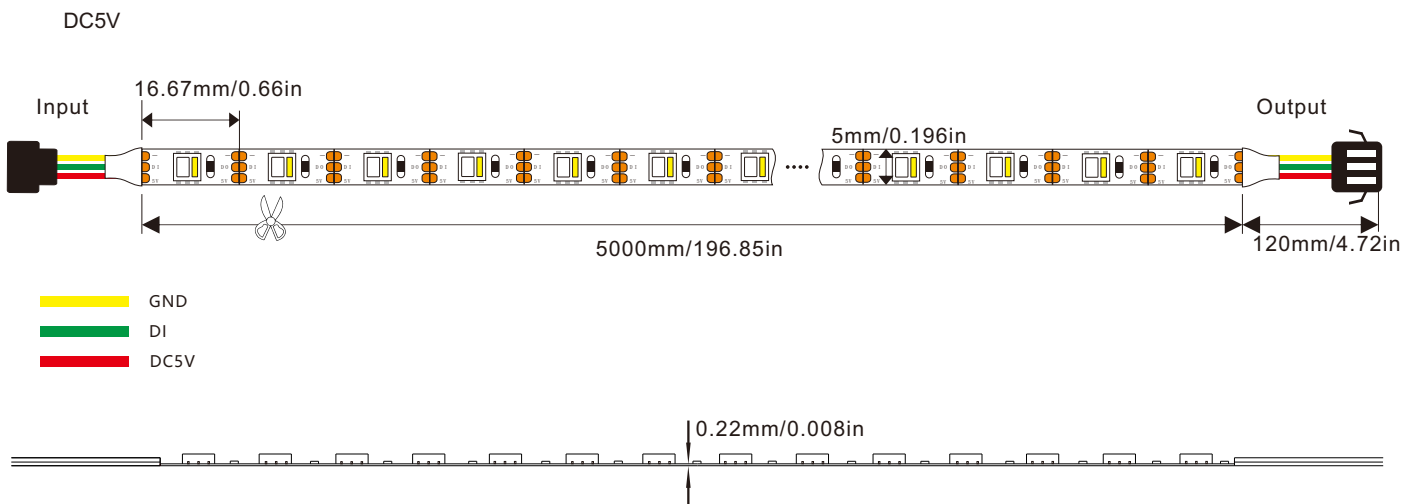

◆ Order number

DC5V	RGBW: 3000K	White PCB	IP20	S005060DA4SA1/C1
DC5V	RGBW: 4000K	White PCB	IP20	S005060DA4SA1/C2
DC5V	RGBW: 6500K	White PCB	IP20	S005060DA4SA1/C3
DC5V	RGBW: 3000K	White PCB	IP65	S005060DA4SA1/C4
DC5V	RGBW: 4000K	White PCB	IP65	S005060DA4SA1/C5
DC5V	RGBW: 6500K	White PCB	IP65	S005060DA4SA1/C6

◆ Wiring diagram



◆ Strip IP Rate



◆ Accessories



Screw




Silicone clip




End cap


◆ Schematic diagram of maximum bending prevention

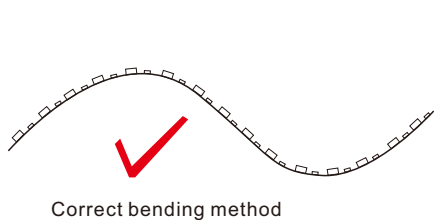

Correct bending method



Wrong way

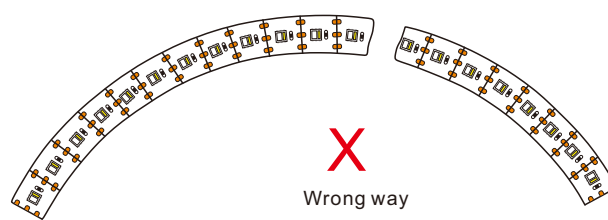

Wrong way

Note: The parameters are subject to change without notice!