

DC24V SMD5050 RGBW LED Strip 60LEDs/M



Product Description:


- This is a PWM control RGBW color LED strip without Pixel
- 60pcs SMD 5050 4 in 1 RGBW LEDs per meter,
- The cutting unit length is 100mm per section
- The PCB is made by 3 Ounce copper
- All soldering Pads are very large, allowing you to cut and reconnect very easy
- DC24V constant voltage operation
- Both ends have 5pin bare wires for powering,
- Common anode, black cable is DC+
- 5meters/reel
- 3M tape attached on backside of FPC
- 3 different waterproof types IP64, IP65, IP67



Product Datasheet

Product Number	S012060CC4PZ	Luminance/M	R: 106 G: 261 B: 59 W: 378lm
Operating Voltage	DC24V	Ra	/
Power/M	19.2W	Beam Angle	120°
SMD Type	SMD 5050 4in1	Size (mm)	5000 * 12mm
LED Qty/M	60	IP Rate	IP20/IP64/IP65/IP67
Color	RGB+W:3000K/4000K/6000K	Operation Temperature	- 25 ~ 60 °C
Pixel/M	/	Material	FPC
Control	PWM	Cutting Length	100mm
Wavelength	R:620-625 G:520-525 B:460-465nm	Net Weight/Roll	0.13KG


Outline Dimension (unit: mm)

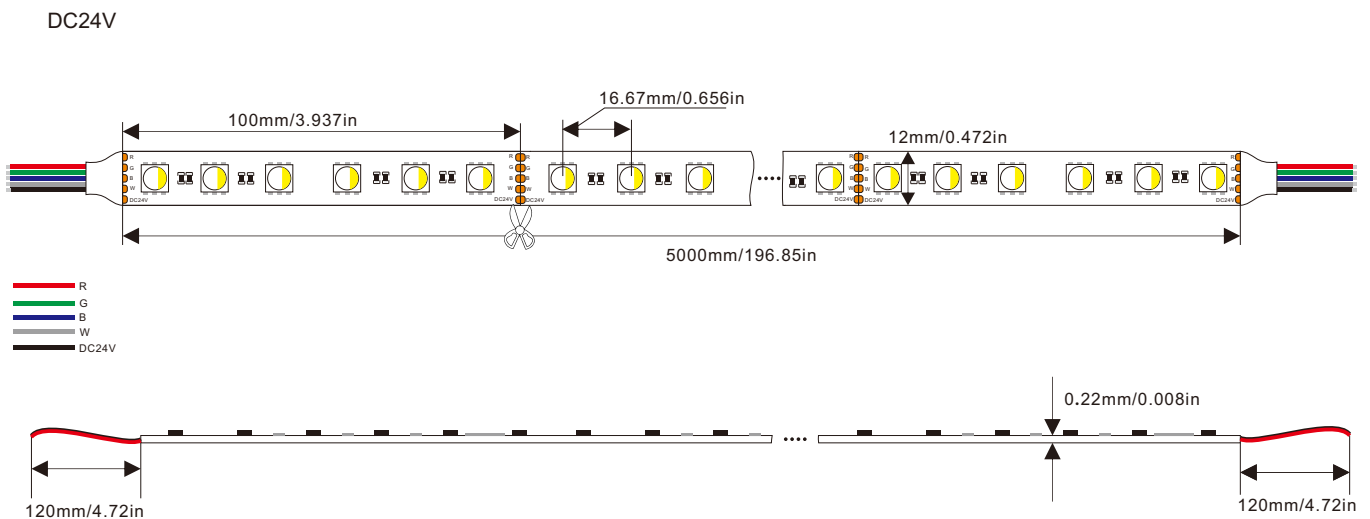


◆ Order number

DC24V	RGB+W:3000K	White PCB	IP20	S012060CC4PZ/C1
DC24V	RGB+W:4000K	White PCB	IP20	S012060CC4PZ/C2
DC24V	RGB+W:6000K	White PCB	IP20	S012060CC4PZ/C3
DC24V	RGB+W:3000K	White PCB	IP65	S012060CC4PZ/C4
DC24V	RGB+W:4000K	White PCB	IP65	S012060CC4PZ/C5
DC24V	RGB+W:6000K	White PCB	IP65	S012060CC4PZ/C6

◆ Wiring diagram

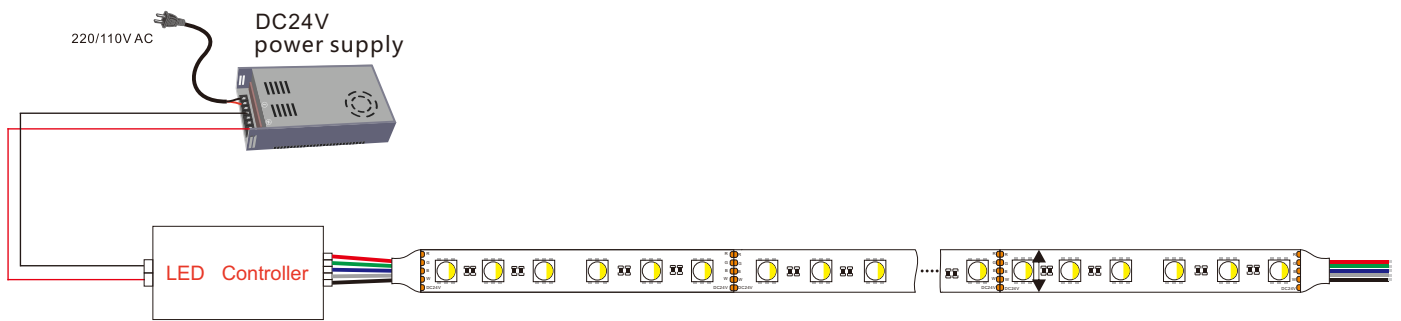

◆ Strip IP Rate

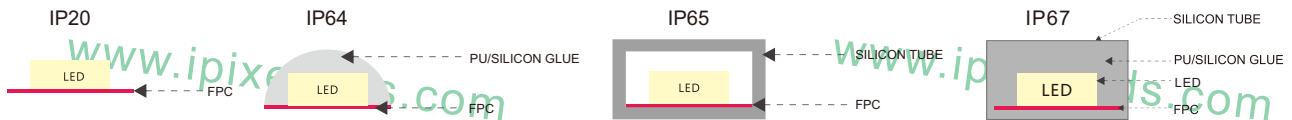

◆ Accessories



Screw




Silicone clip



End cap

◆ Schematic diagram of maximum bending prevention

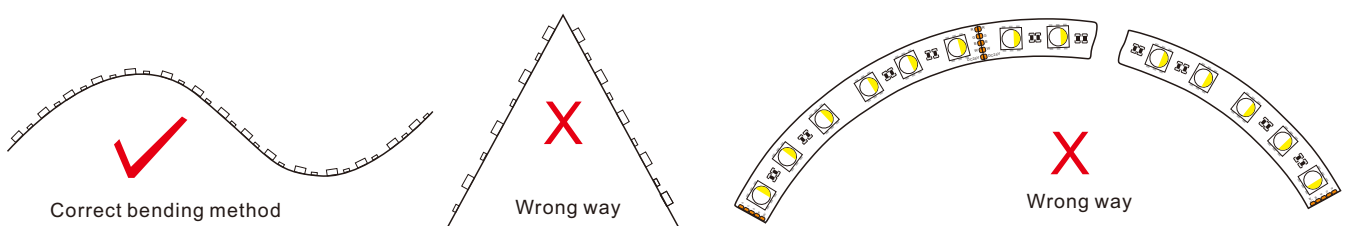

Note: The parameters are subject to change without notice!