



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

SMCJ5.0
THRU
SMCJ220CA

TECHNICAL SPECIFICATIONS OF TRANSIENT VOLTAGE SUPPRESSOR

VOLTAGE RANGE - 5.0 to 220Volts PEAK PULSE POWER - 1500 Watts

FEATURES

- * Glass passivated junction
- * 1500 Watts Peak Pulse Power capability on 10/1000 μ s waveform
- * Excellent clamping capability
- * Low zener impedance
- * Fast response time

MECHANICAL DATA



- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Polarity: Color band denotes positive end (cathode) except bidirectional types
- * Mounting position: Any
- * Weight: 0.21 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load,
For capacitive load, derate current by 20%.



SMC(DO-214AB)

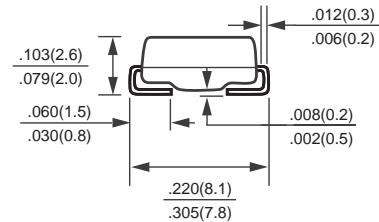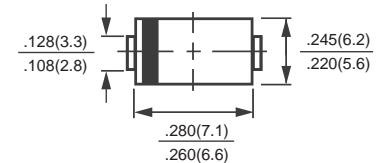

Dimensions in inches and (millimeters)

DEVICES FOR BIPOLAR APPLICATIONS

For Bidirectional use C or CA suffix (e.g. SMCJ5.0C, SMCJ220CA).

Electrical characteristics apply in both directions

	SYMBOL	VALUE	UNITS
Peak Pulse Power Dissipation on 10/1000 μ s waveform (Note1, FIG.1)	PPPM	Minimum 1500	Watts
Steady State Power Dissipation at T = 75°C Lead Lengths .375"(9.5mm) (Note 2)	P _{M(AV)}	5.0	Watts
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load(JEDEC Method) (Note 3)	I _{FSM}	100	Amps
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to + 175	°C

- NOTES :
1. Non-repetitive current pulse, per Fig.3 and derated above TA = 25°C per Fig. 2.
 2. Mounted on Copper Leaf area of 0.31 X 0.31" (8.0 X 8.0mm) per Fig. 5
 3. 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

RATING AND CHARACTERISTIC CURVES (SMCJ5.0 THRU SMCJ220CA)

FIG. 1 - PEAK PULSE POWER RATING CURVE

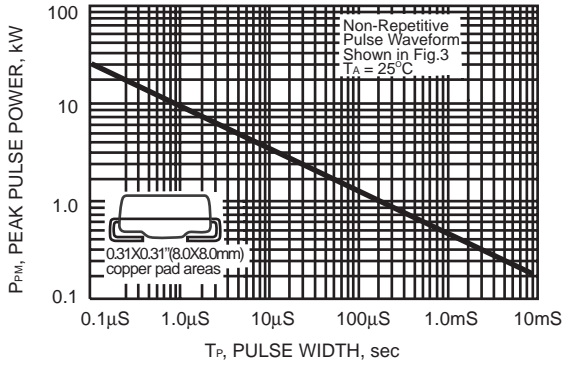


FIG. 2 - PULSE DERATING CURVE

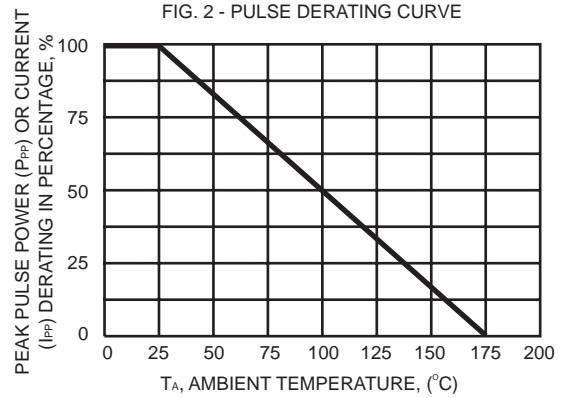


FIG. 3 - PULSE WAVEFORM

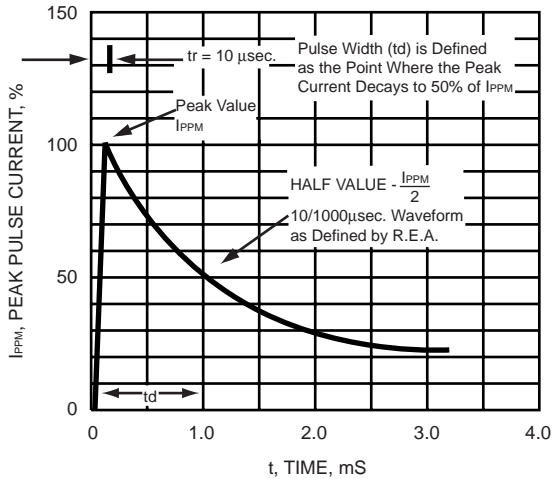


FIG. 4 - TYPICAL JUNCTION CAPACITANCE


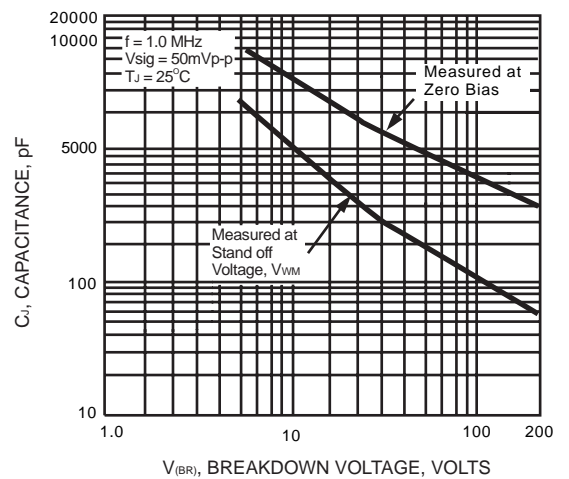


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT UNIDIRECTIONAL

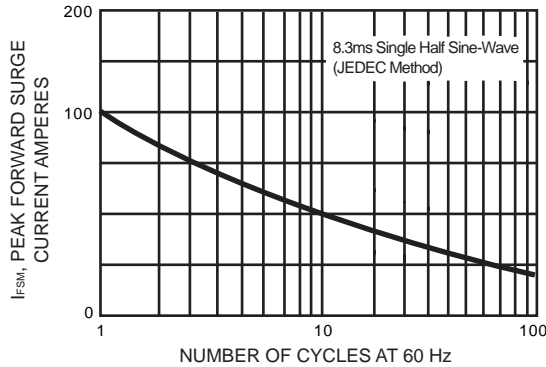

SMCJ (1500W) SERIES TRANSIENT VOLTAGE SUPPRESSORS

TYPE	Reverse Stand-off Voltage	Breakdown Voltage @ I _T		Test Current	Maximum Reverse Leakage @ V _{RWM}		Maximum Clamping Voltage @ I _{PP}	Maximum Peak Pulse Current
	V _{RWM} V	V _{BR}		I _T mA	I _R		V _c V	I _{PP} A
		Min.	Max.		UNI- μA	BI- μA		
		V	V					
SMCJ5.0	5.0	6.40	7.30	10	1000	2000	9.6	156.2
SMCJ5.0A	5.0	6.40	7.00	10	1000	2000	9.2	163
SMCJ6.0	6.0	6.67	8.15	10	1000	2000	11.4	131.6
SMCJ6.0A	6.0	6.67	7.37	10	1000	2000	10.3	145.6
SMCJ6.5	6.5	7.22	8.82	10	500	1000	12.3	122
SMCJ6.5A	6.5	7.22	7.98	10	500	1000	11.2	133.9
SMCJ7.0	7.0	7.78	9.51	10	200	400	13.3	112.8
SMCJ7.0A	7.0	7.78	8.60	10	200	400	12.0	125
SMCJ7.5	7.5	8.33	10.2	1	100	200	14.3	104.9
SMCJ7.5A	7.5	8.33	9.21	1	100	200	12.9	116.3
SMCJ8.0	8.0	8.89	10.9	1	50	100	15.0	100
SMCJ8.0A	8.0	8.89	9.83	1	50	100	13.6	110.3
SMCJ8.5	8.5	9.44	11.5	1	25	50	15.9	94.3
SMCJ8.5A	8.5	9.44	10.4	1	25	50	14.4	104.2
SMCJ9.0	9.0	10.0	12.2	1	10	20	16.9	88.7
SMCJ9.0A	9.0	10.0	11.1	1	10	20	15.4	97.4
SMCJ10	10	11.1	13.6	1		5	18.8	79.8
SMCJ10A	10	11.1	12.3	1		5	17.0	88.2
SMCJ11	11	12.2	14.9	1		5	20.1	74.6
SMCJ11A	11	12.2	13.5	1		5	18.2	82.4
SMCJ12	12	13.3	16.3	1		5	22.0	68.2
SMCJ12A	12	13.3	14.7	1		5	19.9	75.3
SMCJ13	13	14.4	17.6	1		5	23.8	63
SMCJ13A	13	14.4	15.9	1		5	21.5	69.7
SMCJ14	14	15.6	19.1	1		5	25.8	58.1
SMCJ14A	14	15.6	17.2	1		5	23.2	64.7
SMCJ15	15	16.7	20.4	1		5	26.9	55.8
SMCJ15A	15	16.7	18.5	1		5	24.4	61.5
SMCJ16	16	17.8	21.8	1		5	28.8	52.1
SMCJ16A	16	17.8	19.7	1		5	26.0	57.7
SMCJ17	17	18.9	23.1	1		5	30.5	49.2
SMCJ17A	17	18.9	20.9	1		5	27.6	53.3
SMCJ18	18	20.0	24.4	1		5	32.2	46.6
SMCJ18A	18	20.0	22.1	1		5	29.2	51.4
SMCJ20	20	22.2	27.1	1		5	35.8	41.9
SMCJ20A	20	22.2	24.5	1		5	32.4	46.3
SMCJ22	22	24.4	29.8	1		5	39.4	38.1
SMCJ22A	22	24.4	26.9	1		5	35.5	42.2
SMCJ24	24	26.7	32.6	1		5	43.0	34.9
SMCJ24A	24	26.7	29.5	1		5	38.9	38.6
SMCJ26	26	28.9	35.3	1		5	46.6	32.2
SMCJ26A	26	28.9	31.9	1		5	42.1	35.6
SMCJ28	28	31.1	38.0	1		5	50.0	30
SMCJ28A	28	31.1	34.4	1		5	45.4	33
SMCJ30	30	33.3	40.7	1		5	53.5	28
SMCJ30A	30	33.3	38.3	1		5	48.4	31
SMCJ33	33	36.7	44.9	1		5	59.0	25.2
SMCJ33A	33	36.7	40.6	1		5	53.3	28.1
SMCJ36	36	40.0	48.9	1		5	64.3	23.3
SMCJ36A	36	40.0	44.2	1		5	58.1	25.8
SMCJ40	40	44.4	54.3	1		5	71.4	21
SMCJ40A	40	44.4	49.1	1		5	64.5	23.2

SMCJ (1500W) SERIES TRANSIENT VOLTAGE SUPPRESSORS

TYPE	Reverse Stand-off Voltage	Breakdown Voltage @ I _T		Test Current	Maximum Reverse Leakage @ V _{RWM}		Maximum Clamping Voltage @ I _{PP}	Maximum Peak Pulse Current
	V _{RWM} V	V _{BR}		I _T mA	I _R		V _C V	I _{PP} A
		Min.	Max.		UNI- μA	BI- μA		
		V	V					
SMCJ43	43	47.8	58.4	1	5	76.7	19.6	
SMCJ43A	43	47.8	52.8	1	5	69.4	21.6	
SMCJ45	45	50.0	61.1	1	5	80.3	18.7	
SMCJ45A	45	50.0	55.3	1	5	72.7	20.6	
SMCJ48	48	53.3	65.1	1	5	85.5	17.5	
SMCJ48A	48	53.3	58.9	1	5	77.4	19.4	
SMCJ51	51	56.7	69.3	1	5	91.1	18.5	
SMCJ51A	51	56.7	62.7	1	5	82.4	18.2	
SMCJ54	54	60.0	73.3	1	5	96.3	15.6	
SMCJ54A	54	60.0	66.3	1	5	87.1	17.2	
SMCJ58	58	64.4	78.7	1	5	103.0	14.6	
SMCJ58A	58	64.4	71.2	1	5	93.6	16	
SMCJ60	60	66.7	81.5	1	5	107.0	14	
SMCJ60A	60	66.7	73.7	1	5	96.8	15.5	
SMCJ64	64	71.1	86.9	1	5	114	13.2	
SMCJ64A	64	71.1	78.6	1	5	103	14.6	
SMCJ70	70	77.8	95.1	1	5	125	12	
SMCJ70A	70	77.8	86.0	1	5	113	13.3	
SMCJ75	75	83.3	102.0	1	5	134	11.2	
SMCJ75A	75	83.3	92.1	1	5	121	12.4	
SMCJ78	78	86.7	106.0	1	5	139	10.8	
SMCJ78A	78	86.7	95.8	1	5	126	11.4	
SMCJ85	85	94.4	115.0	1	5	151	9.9	
SMCJ85A	85	94.4	104.0	1	5	137	10.4	
SMCJ90	90	100	122.0	1	5	160	9.4	
SMCJ90A	90	100	111.0	1	5	146	10.3	
SMCJ100	100	111	136.0	1	5	179	8.4	
SMCJ100A	100	111	123.0	1	5	162	9.3	
SMCJ110	110	122	149.0	1	5	196	7.7	
SMCJ110A	110	122	135.0	1	5	177	8.4	
SMCJ120	120	133	163.0	1	5	214	7	
SMCJ120A	120	133	147.0	1	5	193	7.9	
SMCJ130	130	144	176.0	1	5	231	6.5	
SMCJ130A	130	144	159.0	1	5	209	7.2	
SMCJ150	150	167	204.0	1	5	268	5.6	
SMCJ150A	150	167	185.0	1	5	243	6.2	
SMCJ160	160	178	218.0	1	5	287	5.2	
SMCJ160A	160	178	197.0	1	5	259	5.8	
SMCJ170	170	189	231.0	1	5	304	4.9	
SMCJ170A	170	189	209.0	1	5	275	5.5	
SMCJ180	180	198	244.8	1	5	322	4.7	
SMCJ180A	180	198	220.0	1	5	292	5.1	
SMCJ190	190	209	258.4	1	5	340	4.4	
SMCJ190A	190	209	232.0	1	5	308	4.8	
SMCJ200	200	220	247.0	1	5	358	4.1	
SMCJ200A	200	220	256.0	1	5	324	4.6	
SMCJ210	210	231	296.1	1	5	376	4	
SMCJ210A	210	231	268.8	1	5	340	4.4	
SMCJ220	220	242	310.2	1	5	394	3.8	
SMCJ220A	220	242	272.0	1	5	356	4.2	

Disclaimer

Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold *DC COMPONENTS* harmless against all damages.

DC COMPONENTS disclaims any and all liability arising out of the application or use of any product, including consequential or incidental damages. Statement regarding the suitability of products for certain types of applications are based on *DC COMPONENTS*'s knowledge of typical requirements that are often placed on *DC COMPONENTS* products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

DC COMPONENTS reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein, and disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Parameters provided in datasheets and specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify *DC COMPONENTS*'s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise in writing, *DC COMPONENTS* products are intended for use as general electronic components in standard applications (eg: Consumer electronic, Computer equipment, Office equipment, etc.), and not recommended for use in a high specific application where a failure or malfunction of the device could result in human injury or death (eg: Aerospace equipment, Submarine cables, Combustion equipment, Safety devices, Life support systems, etc.)

Customers using or selling *DC COMPONENTS* products not expressly indicated for use in such applications do so at their own risk. If customer intended to use *DC COMPONENTS* standard quality grade devices for applications not envisioned by *DC COMPONENTS*, please contact our sales representatives in advance.



DC COMPONENTS CO., LTD.