


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE






SR-M12X-XXP-MM-SF7003-00A(H)

Coding: A,B,D Pin number: 04,05,08

8pin A Coding



Pin Assignments Front View

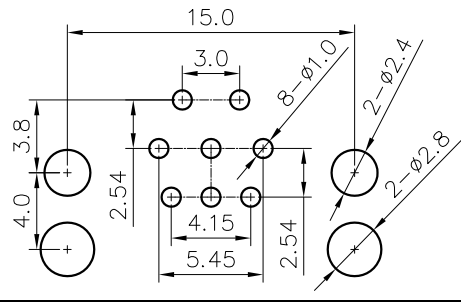


Panel Mounted

NOTES:


- Rated voltage/current : 4pin A: 250V / 4A
5pin A: 60V / 4A
8pin A: 30V / 2A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage : 4pin A: AC1500V/1Min
5pin A: AC1120V/1Min
8pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min
- Levels of protection: IP67
- Wire connection mode: soldering(PCB)
- Operating temperature: -40°C~+105°C
- For Panel Thickness Max: 4.5mm
- RoHS Compliance

4pin A Coding




Pin Assignments Front View

4pin D Coding




Pin Assignments Front View

5pin A Coding





Pin Assignments Front View

5pin B Coding



Pin Assignments Front View

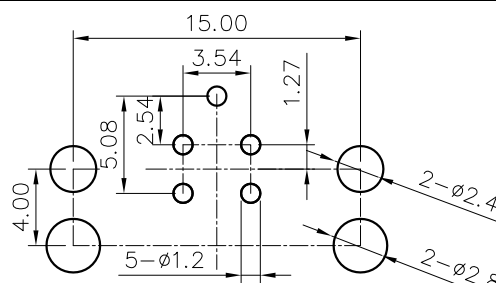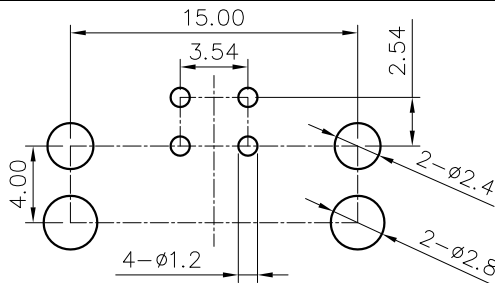

DETACHED LISTS	PART NO.: SRM12XXXXPMMSF700300AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SR-M12X-XXP-MM-SF7003-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.03.26	REV: D0-1	SHEET: 1/1	SCALE: 1:1
	THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX (MM (INCH))	DO NOT SCALE DRAWING