


DATA SHEET

**Optima**

SURGE PROTECTOR

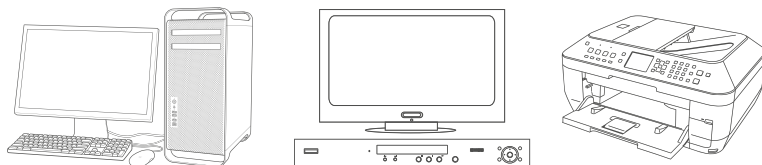

**Surge protector OPTIMA** is designed for users who want to protect their equipment against energy threats encountered in the workplace and at home. Surge protector is dedicated to devices such as **desktop and mobile computers, peripheral devices and consumer electronics.**

FEATURES

- Six high efficiency sockets. All sockets have interlocks that prevent children from accessing dangerous components (Child Protection System).
- Plug with ground terminal.
- Bipolar, highlighted switch. Ability to disconnect all stand-by mode devices (energy saving)
- Surge protector indicator.
- Automatic fuse for restarting the protector in case of short circuit or overload, once the cause of the fault has been removed.
- Holes for wall-mounting. Installation template available in the user manual.
- 6 year warranty.
- Connected device insurance up to 1600 EUR.



<p>POWER CORD LENGHT</p> <p><b>1,5m</b></p>	<p>POWER CORD LENGHT</p> <p><b>3m</b></p>	<p>POWER CORD LENGHT</p> <p><b>5m</b></p>	<p>FRENCH OUTPUT OUTLETS</p>
<p>ENERGY ABSORPTION UP TO</p> <p><b>175J</b></p>	<p>INSURANCE OF CONNECTED DEVICE UP</p> <p><b>1600 EUR</b></p>	<p>WARRANTY</p> <p><b>6 YEAR</b></p>	<p>OUTLETS WITH CHILD PROTECTION SYSTEM</p>




### TECHNICAL DATA

PARAMETERS \ NAME	Optima		
	Optima 1,5 m	Optima 3,0 m	Optima 5,0 m
Part number	T/LZ08-OPT015/0000	T/LZ08-OPT030/0000	T/LZ08-OPT050/0000
Type	Surge protector		
Rated voltage and frequency	~ 250 V / 50 Hz		
Maximum current (total)	10 A		
Single outlet maximum load	10 A		
Number and type of power outlets	6; in accordance with NF C 61-314; System Child Protection		
Circuit breaker	1 x automatic fuse 10 A		
Type of surge protection	SPD type 3		
Protected lines	L - N		
Energy absorption (total)	175 J		
Test voltage $U_{OC(L-N)}$	6 kV		
Voltage protection level $U_{P(L-N)}$	1,3 kV		
Continuous operating voltage $U_c$	~ 275 V		
Impulse discharge current $I_{MAX(L-N)}$	6 kA		
Indicators	1x LED (surge protector indicator)		
Plug	NF C 61-314		
Power switch	2-pole lighted		
Dimensions [W x D x H]	53 x 359 x 39 mm		
Power cord length	1,5 m	3 m	5 m
Net weight	412 g	546 g	724 g
Warranty	6 years		
Insurance	1600 EUR		

Note: The manufacturer reserves the right to modify the above parameters without prior notification.  
**Product complies with CE.**

### STRUCTURE



6 mains outlets with



Surge protector indicator



Plug with ground terminal

### CHILD PROTECTION SYSTEM



Automatic fuse



Bipolar, highlighted switch  
 Ability to disconnect all stand-by mode devices (energy saving)



Holes for wall-mounting.

**NOTE:** Installation template available in the user manual.

