


TCPCConv

USB/RS232 Ethernet/Switch



TCPCConv adds a device, which is equipped with a USB- or RS232-interface into your local area network (LAN). A typical application is the extension of a network device (i.e. a network printer) by a local peripheral device. Simply insert TCPCConv into the existing LAN connection of your device. In order to do so, TCPCConv contains 2 LAN ports, which operate as a network switch. The example below shows a typical environment, where a printer is connected to a network:

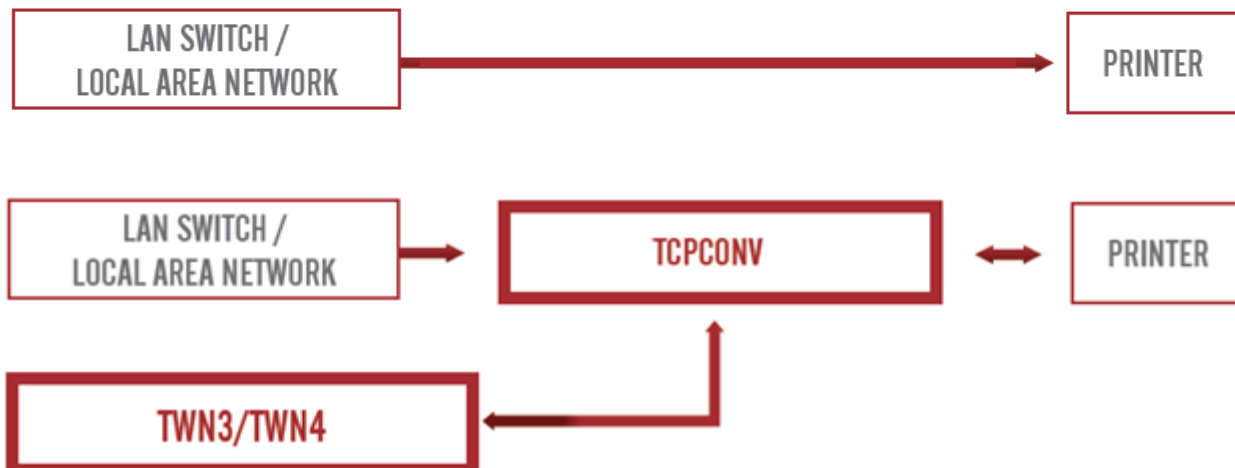

Technical Data	
Housing	ABS UL94-V0
Dimensions (L x W x H)	82mm x 65mm x 25mm / 3.23inch x 2.56inch x 0.98inch
Power	Power Supply: External power supply 5V Supply Current: 300mA (max., no external load), up to 800mA
Temperature Range	Operating: 0°C to +70°C (-4°F to 158°F) Storage: -40°C up to +85°C (-40°F up to +185°F)
Relative Humidity	10% to 90% non-condensing
Ethernet Switch	Transfer Rate: 10 / 100 Mbit/s Other features: Auto MDI/MDIX
USB	Type: USB HOST Maximum Current: 500mA Supported Devices: Elatec TWN3 and TWN4 transponder readers/writers
RS232	Baudrate: Configurable 300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600 or 115200 Baud Databits: 7 or 8 bits Parity: None, even or odd parity Stopbits: 1 or 2
Connections	Ethernet: 2 x RJ45, 10/100BaseT USB: 1 x USB-A receptacle RS232: 1 x DSUB 9pos Power: For plug 5.5mm/2.1mm
LAN Communication	Protocols: TCP, IPV4 (IPV6 on request), DHCP, ARP, PING Modes of Operation: TCP Server: Device is connected by a TCP client. TCP Client: Device connects automatically to a specified TCP server. Connection may be triggered by incoming flow of data on either the USB or RS232 port.
Certification	CE, RoHS-II compliant
Weight	Approx. 85g (without power supply) Approx. 165g (with power supply)
Order Code	TC1K-BT1EU – TCPCConv Kit with 0.5m patch cable (RJ45) and power supply EU TC1K-BT1UK – TCPCConv Kit with 0.5m patch cable (RJ45) and power supply UK TC1K-BT1US – TCPCConv Kit with 0.5m patch cable (RJ45) and power supply US TC1K-BT1AUS – TCPCConv Kit with 0.5m patch cable (RJ45) and power supply AUS TC2K-BT1JP – TCPCConv Kit with 0.5m patch cable (RJ45) and power supply JP

Elatec reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. Elatec declines all responsibility for the use of product with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names are registered trademarks. © 2015 Elatec GmbH – DocRev8 – 08/2015