

# TCPCONV 2

## USB/RS232-ETHERNET CONVERTER





The Elatec TCPConv 2 enables card based features (such as authentication and pull printing) on devices that do not have support for the direct connection of a USB proximity card reader (i.e. single function printers).

The card reader connects directly to the TCPConv 2, which is connected to the printer. When a card is swiped, the TCPConv 2 sends the card data directly to the authentication server. In this way, the card data completely bypasses the single function printer. As a result, the TCPConv 2 can work with network printers from any printer manufacturer.

1. Typical printer connected to a Local Area Network:



2. Example of integration of printer together with RFID reader and TCPConv 2 in a Local Area Network:

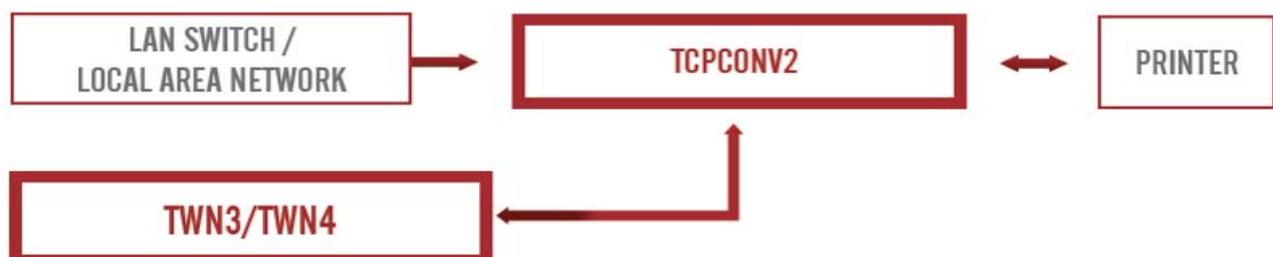

## TECHNICAL DATA

HOUSING	ABS UL94-V0
DIMENSIONS (L X W X H)	95 mm x 95 mm x 25 mm
POWER SUPPLY	External power supply 5 V
CURRENT CONSUMPTION	Max. 3 A depending on external load
TEMPERATURE RANGE	Operating: 0°C to +45°C (32°F to 113°F) Storage: -40°C up to +85°C (-40°F up to +185°F)
RELATIVE HUMIDITY	10% to 90% non-condensing
TRANSMISSION SPEED	10 Mbit/s, 100 Mbit/s
MODES OF OPERATION	TCP Server: Device is connected by a TCP client. TCP Client: Device connects automatically to a specified TCP server. Connection may be triggered by incoming flow of data on either the USB or RS-232 port. For additional security the connection can be optionally SSL encrypted.
LAN COMMUNICATION PROTOCOLS	TCP, IPV4, DHCP, SSL, Syslog
USB	Type: 2.0 (One OTG and one Host) Maximum current: Mini-USB: 1.5 A, USB-A: 0.5 A, RS232: 0.5 A Supported devices: Elatec TWN3 or TWN4 transponder readers/writers; all HID keyboard/CDC devices
RS232	Baudrate: Configurable 300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600 or 115200 baud Databits: 7 or 8 bits Parity: None, even or odd parity Stopbits: 1 or 2 Maximum current: 0.5 A
CONNECTORS	Ethernet: 2 x RJ45, 10/100BaseT USB: 1 x USB-A receptacle, 1 x Mini USB RS232: 1 x DSUB-9 Power: For plug 5.5 mm/2.1 mm
MEMORY	RAM: 128 MB Flash: 2 GB
MTBF	500,000 hours
WEIGHT	Approx. 270 g
CERTIFICATIONS	RoHS-II compliant, CE, FCC, IC
ORDER CODE(S)	TC2K-BT2EU: TCPCConv 2 Kit with 0.5 m patch cable (RJ45) and power supply EU TC2K-BT2US: TCPCConv 2 Kit with 0.5 m patch cable (RJ45) and power supply UK TC2K-BT2AUS: TCPCConv 2 Kit with 0.5 m patch cable (RJ45) and power supply US TC2K-BT2UK: TCPCConv 2 Kit with 0.5 m patch cable (RJ45) and power supply AUS TC2K-BT2JP: TCPCConv 2 Kit with 0.5 m patch cable (RJ45) and power supply JP

ELATEC GmbH • Zeppelinstr. 1 • 82178 Puchheim • Germany  
P +49 89 552 9961 0 • F +49 89 552 9961 129 • E-Mail: info-rfid@elatec.com  
elatec.com



Elatec reserves the right to change any information or data in this document without prior notice. Elatec declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.