


stonecold

PM-40X40-38

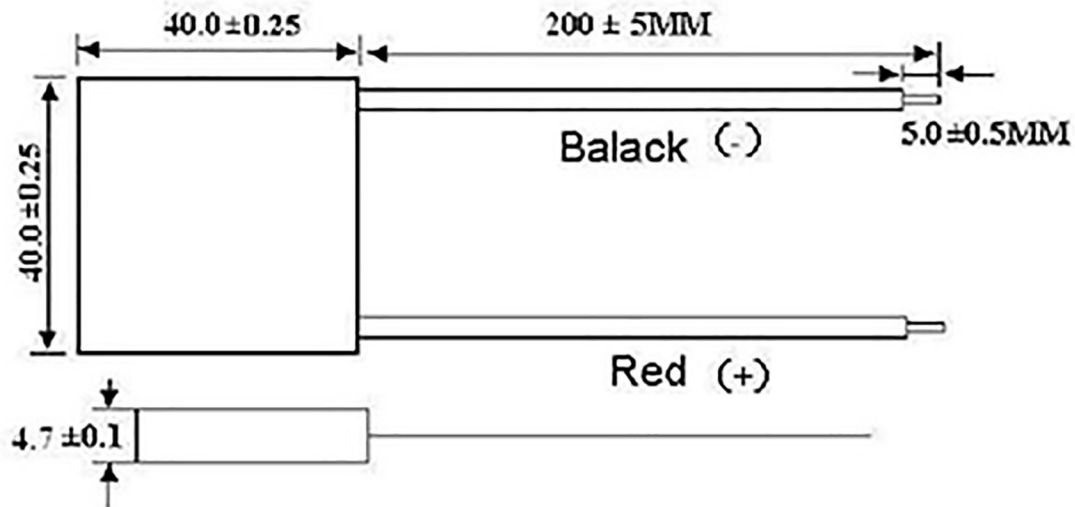


No.	Items	Symbol	Parameter	Condition
1	Max. Operating Tem.	T	200°C	
2	Max. Cooling Power	Q _{max}	33	Vacuum testing Tem Th=30°C
3	Tem. Difference Max	ΔT _{max}	68	Vacuum testing Tem Th=30°C
4	Input Voltage Max.	V _{max}	15.4	Vacuum testing Tem Th=30°C
5	Max. Current	I _{max}	3.0	Vacuum testing Tem Th=30°C
6	Resistance	R	3.2-3.5	Ambient Tem Th=25°C
7	Parallel		≤0.05 mm	

When the ambient temperature raise or fall 1°C, the module resistance will raise or fall 0.015 accordingly.


stonecold

PM-40X40-38

Vin — I — TC Graph Th=50°C

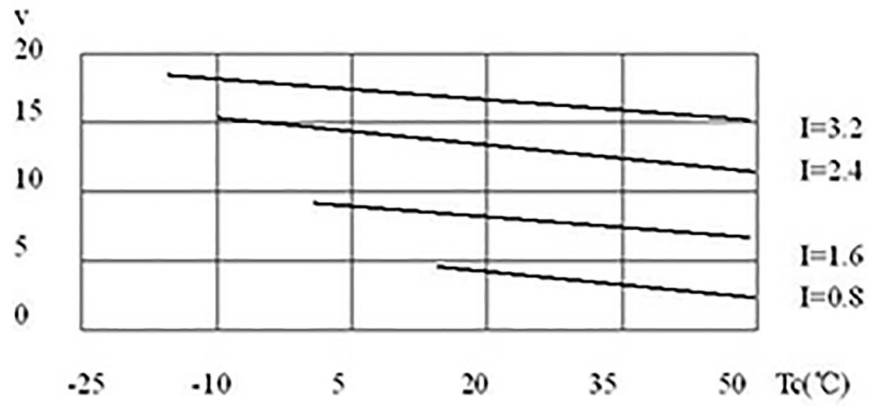


Qc — I — DT Graph Th=50°C

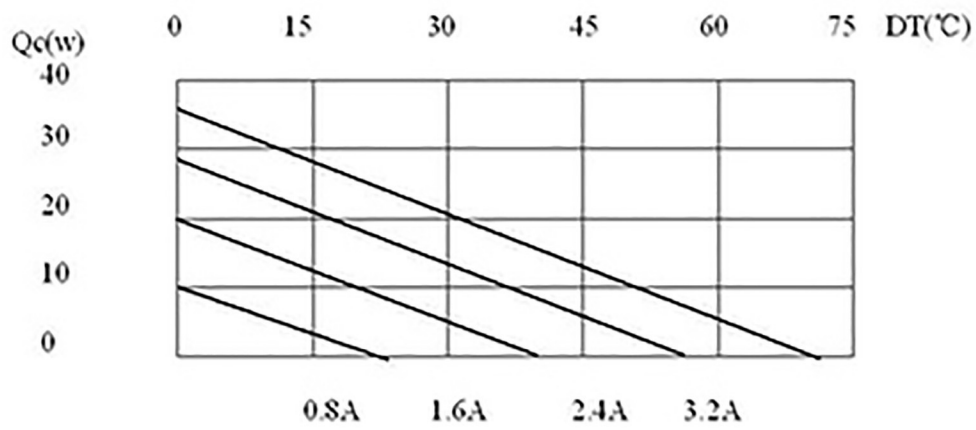

stonecold

PM-40X40-38

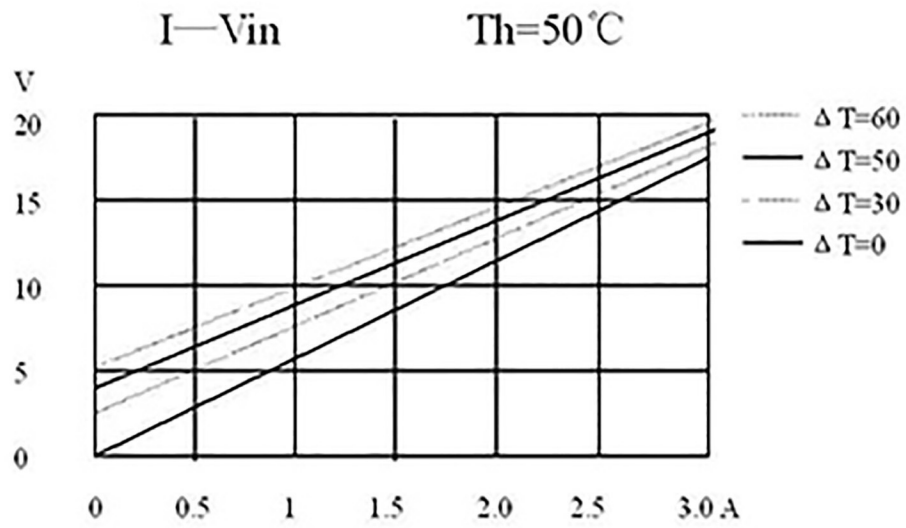

stonecold

PM-40X40-38

