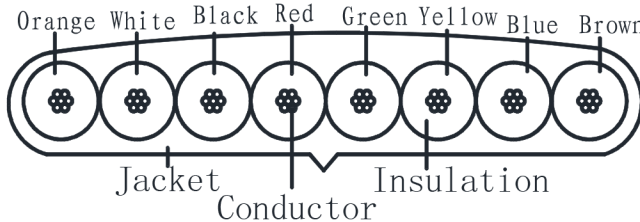


WIRE&CABLE SPECIFICATION  
(电线电缆规格书)

|                     |                      |  |   |                  |                     |   |   |         |           |            |
|---------------------|----------------------|--|---|------------------|---------------------|---|---|---------|-----------|------------|
| specification (规格)  |                      | NOUL 28AWG*8C Telephone line                   |   |                  |                     | Picture(附图)   |   |         |           |            |
| Item (项目)           |                      | 28AWG*8C                                       |   |                  |                     |  |   |         |           |            |
| Conductor<br>(导体)   | AWG(规格)              | 28AWG  |   |                  |                     |   |   |         |           |            |
|                     | Material(材料)         | Bare copper clad aluminum                      |   |                  |                     |   |   |         |           |            |
|                     | Cond. Size (导体尺寸)    | 7/0.12±0.008mm                                 |   |                  |                     |   |   |         |           |            |
| Insulation<br>(绝缘体) | Avg. Thick (平均厚度)    | 0.22MM Ref                                     |   |                  |                     |   |   |         |           |            |
|                     | Material(材料)         | PP   |   |                  |                     |   |   |         |           |            |
|                     | O. D (直径)            | 0.95±0.05MM                                    |   |                  |                     |   |   |         |           |            |
|                     | Color(颜色)            | Orange White Black Red Green Yellow Blue Brown |   |                  |                     |   |   |         |           |            |
| intertwist<br>(绞合)  | space between (间距)   | /  |   |                  |                     |   |   |         |           |            |
|                     | space between (间距)   | /  |   |                  |                     |   |   |         |           |            |
|                     | Al/My(铝箔/麦拉)         | /  |   |                  |                     |   |   |         |           |            |
|                     | Drain(地线)            | /  |   |                  |                     |   |   |         |           |            |
| Braid<br>(编织)       | Material(材料)         | /  |   |                  |                     |   |   |         |           |            |
|                     | Cond. Size (导体尺寸)    | /  |   |                  |                     |   |   |         |           |            |
|                     | Shield Coverage(遮蔽率) | /  |   |                  |                     |   |   |         |           |            |
| Jacket<br>(外被)      | Material(材料)         | PVC  |   | Rigidity (硬度)    | 60P                 |   | Customer(客户) : Transfer Multisort Elektronik<br>Part. No (部件编号) : |         |           |            |
|                     | Color(颜色)            | White  |   | O. D (直径)        | 2.4±0.15*8.8±0.25mm |   |   |         |           |            |
|                     | Surface(表面处理)        | Half-Matte                                     |   | Extrusion (押出方式) | Solid Plane(Bone)   |   |   |         |           |            |
| Marking<br>(印字)     | /                    |  |   |                  | /                   | /   |   |         |           |            |
|                     | height: /            | Color:   | / | font:            | /                   | Approved  | Checked   | Drawing | Part. No: | WL-0270143 |
| Advice (建议) :       |                      | Customer Approval<br>(客户确认) :                  |   |                  | /                   |   | /   |         | Rev:      | A/0        |
| /                   |                      | /  |   |                  | /                   |   | /   |         | Data:     | 2016.04.15 |