
UQS-COB-8W-W-12V			
Professional Led Strip, 8W/m			POS
			■ Features:
A DECEMBER OF THE OWNER OWNER OF THE OWNER OWN	Construction of the local division of the lo		• Uniform lighting
		• Uniform light lin	e and high luminous intensity
Contraction of the second seco	+0024V +0024V +0024V +0024V		5
940 C AD ON		6500K WHITE	• 3 years warranty
TECHNICAL DETAILS			3 warranty IP33 CRI > 90 (180°) lens
MODEL	UQS-COB-8W-W-12V		EPREL
Supply voltage	12V ± 0.5Vdc		
Power	8W/m (40W/reel)	\sim	ENERG [*]
Current	0.66 A/m (3.3A/roll)		LIGHTING
Power per reel	40W	UQS-COE	3-8W-W-12V
Color temperature	6500K	A	
Beam angle	180°	В	
Luminous flux	820 lm/m (4100lm/roll)	С	
CRI	>90	D	
Maximum length for one sided supply	5m	E	
IP protection degree	IP20	F	
Working temperature	-20°C ÷ 50°C	G	
Storage temperature	-30°C ÷ 80°C	_	
LED QTY	320 LEDs/m (1600 LEDs/reel)	- 4	
Width PCB	8mm	kWh	/1000h
Cut section	25mm	- <u>P</u>	
Connection wire	2 x AWG20 (0.52 mm2) stranded wir length = 360 mm: V+: red: V-:black.		2019/2015
Dimensions (L x W x H)	5004 x 8 x 2.2 mm	— Ľ.	
Packing	5m / reel (bag)		

MECHANICAL SPECIFICATION:

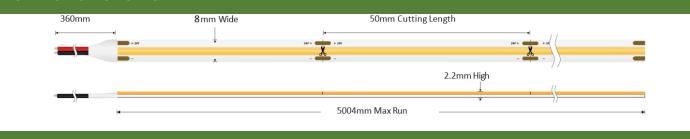

IIOC-COR- $Q_{M} = 12$