

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

Upgrade



Chip type, High Capacitance & High Ripple Current
Series



- High ripple current compared with YH series
- High temperature range, for 125°C use
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.


YH → YM
High ripple



Item	Characteristics										
Operating temperature range	-55 ~ +125°C										
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)										
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C										
Dissipation factor max. (at 120Hz, 20°C)	WV	16	25	35	50	63					
	$\tan\delta$	0.16	0.14	0.12	0.1	0.08					
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25^\circ C) / Z(+20^\circ C) \leq 1.5$ $Z(-55^\circ C) / Z(+20^\circ C) \leq 2.0$										
Load life	After an application of DC bias voltage plus the rated AC ripple current for 4000 hours at 125°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.										
	Capacitance change	Within $\pm 30\%$ of initial value									
	$\tan\delta$	Less than 200% of the specified value									
	ESR	Less than 200% of the specified value									
	Leakage current	Less than specified value									
Shelf life(at 125°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4										
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.										
	Leakage current	Less than specified value									
	Capacitance change	Within $\pm 10\%$ of initial value									
	$\tan\delta$	Less than specified value									

Unit : mm

DRAWING

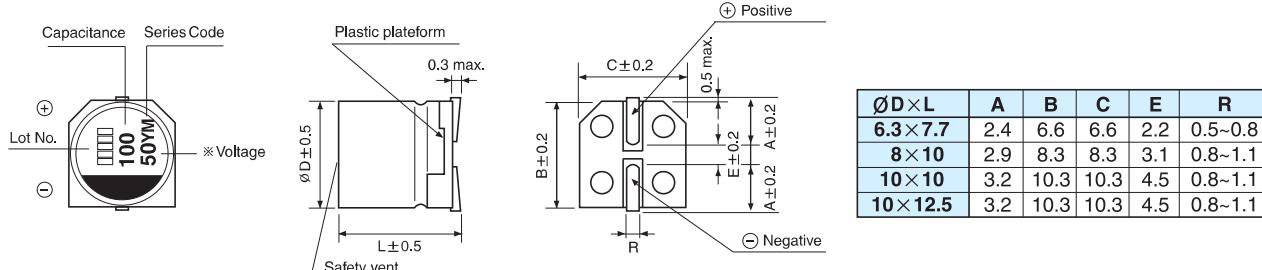

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	16	25	35	50	63
47					6.3 × 7.7	40
82						1500
100				6.3 × 7.7	35	1700
150	6.3 × 7.7	27	1800	6.3 × 7.7	30	1700
220				8 × 10	27	2000
330			8 × 10	27	2000	10 × 12.5
390	8 × 10	22	2000	10 × 10	20	2800
560				10 × 12.5	17	3500
680	10 × 10	18	2800	10 × 12.5	16	3500
820	10 × 12.5	14	3500			

↑ ↑ ↑
Ripple current (mA rms) at 125°C, 100kHz
ESR (mΩ) at 20°C, 100kHz
Case size $\emptyset D \times L$ (mm)

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00