



### Features:

- No UV or IR light radiation.
- Provide 120° beam angles.
- Easy Installation
- Very Low Power Consumption:

Less than 14.4Watts/m

- Long lifetime: 25000 hours (L<sub>70</sub>).
- High CRI: 70-85
- Correlated Color Temperature: RGB color
- Operating temperature:  $-20^{\circ}\text{C} + 60^{\circ}\text{C}$
- 12V DC input.
- 60 leds per meter, each 3 leds as one series, each series can be cutted ,5 meter per roll.
- Led type:5050 LED
- Waterproof grade IP20

## Benefits:

**Energy Cost Savings:** 

Over 60% Compared to Incandescent.

Solid-State:

High-Shock & High-Vibration Resistant,

Both Electrical and Mechanical

Eco-Friendly:

No Mercury, No Lead Content

No Hazardous Emissions:

No UV or IR Radiation

Constant Light Output:

Even Lighting, Non-Halation

# **Application:**

- **Entertainment Lighting**
- Architectural lighting
- City Beautification
- Landscape lighting.
- Furniture decoration
- Bar lighting
- Other lighting

Phone: +86-755-2518-8967

# **Product Specifications:**

**Data Sheet** 

Input Voltage	12V DC		
Wattage	14.4W/m		
Operating Frequency	50-60Hz		
Operating Temperature	-20°C ∽ +60°C		
Storage Temperature	-30°C ∽ +70°C		
Net Weight per piece (g)			
Certification	RoHS Compliant		

### **Product Selection Guide:**

Product	Beam Angle	Total Lumens	CCT/Wavel ength	Color	CRI
LS-5050WW60RN-2	120°	960±5%	2700-3500K	Warm White	≥ 70
LS-5050NW60RN-2	120°	1000±5%	4000-5500K	Neuter White	≥ 70
LS-5050W60RN-2	120°	1080±5%	6000-6500K	White	≥ 70

# LS-5050/XX/60/RN/2

(1)

2

3

4

(5

6

① LS: Light Strip

② 5050: LED Type

③ XX: WW(Warm White) NW (Neuter White) W (White)


④ 60: 60 pcs of LED

⑤ RN: DC 12V

6 2: Waterproof grade IP20

Phone: +86-755-2518-8967

### **Product Dimensions:**

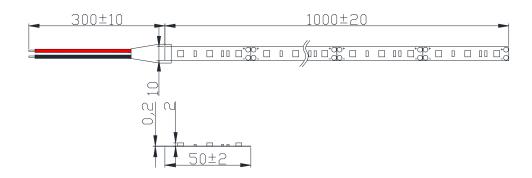


#### Notes:

**Data Sheet** 

- 1. All dimensions unit in mm
- 2. Tolerances are  $\pm 0.5$ mm unless otherwise noted.

# Package Dimension

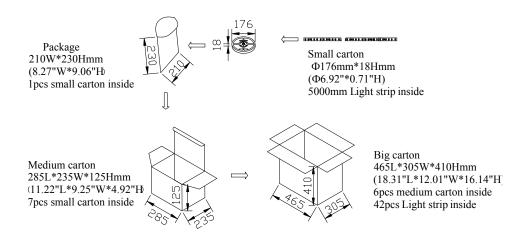

### Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Please make sure to use a suitable adapter. Please mind the minimum load of your adapter.

04-Mar-16 © 2016 luckylight