





SM61 IoT - DATA LOGGER TO IoT APPLICATIONS


- The MQTT protocol is ideal for communication in distributed acquisition systems data (IoT applications).
- Modbus TCP protocol for communication in SCADA systems.
- Built-in WWW for visualisation of current and archived data according to customer configuration (synoptic maps, charts, tables) by any web browser.
- Readout up to 2500 values from slave devices (up to 100 devices, each 25 registers).
- User-friendly application for data configuration (SM61IoT CONFIG).
- 1...8 GB Flash memory (1GB as standard).
- Built-in FTP server.
- Alarms or binary inputs for control of archiving.
- RTC (real time clock).
- Possibility of simultaneously work by many users.
- User's access control by a password.

APPLICATION EXAMPLES

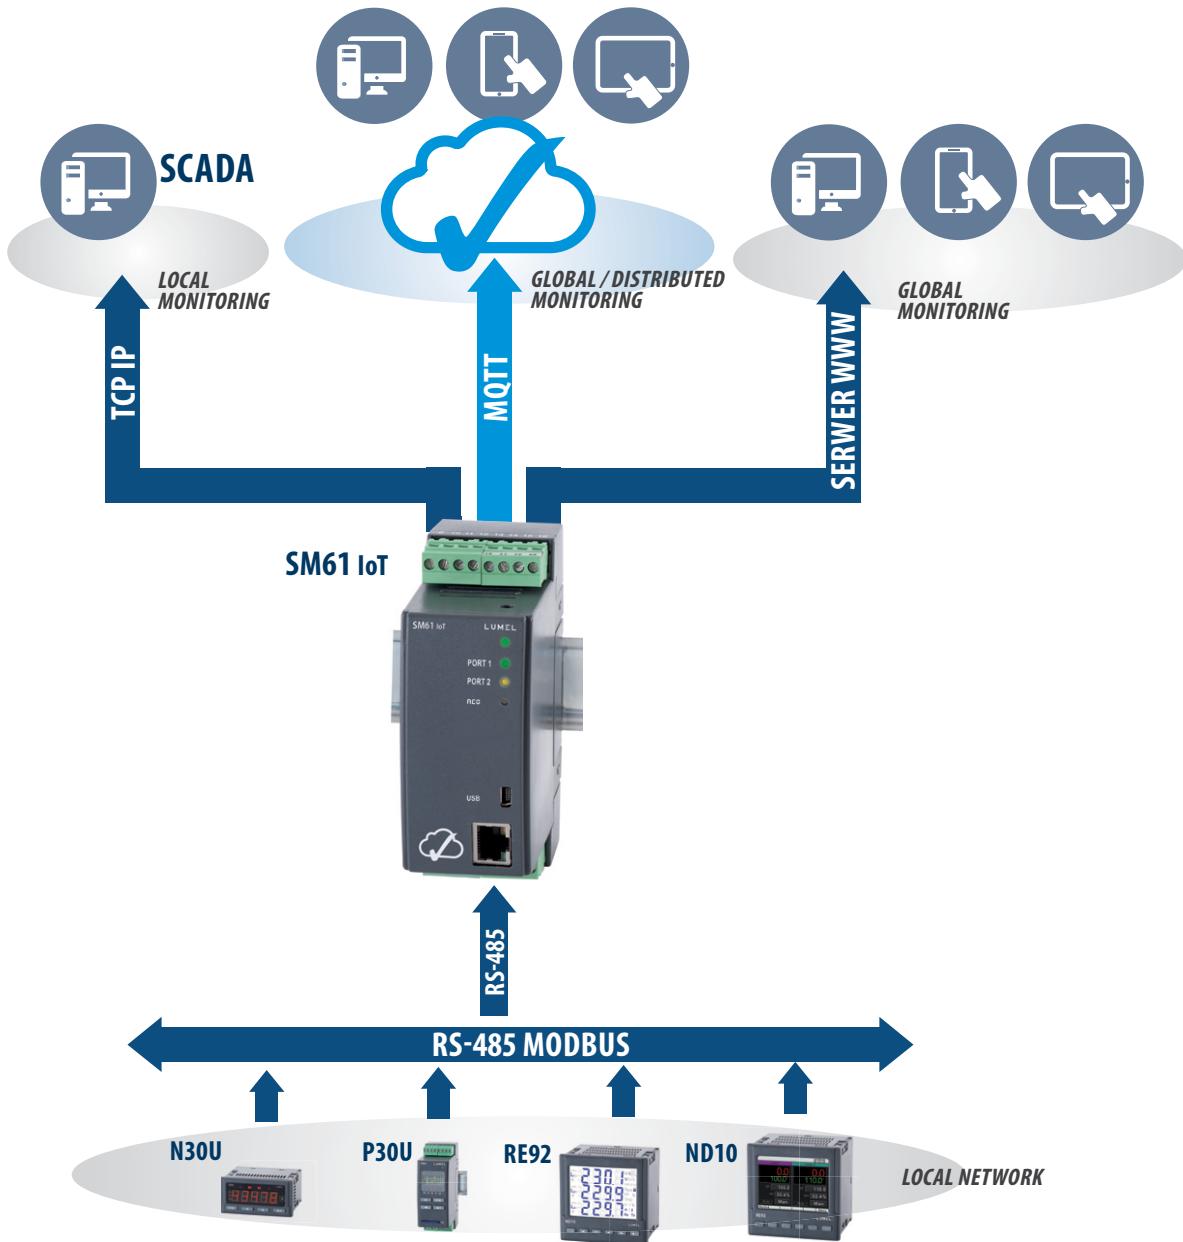

APPLICATION EXAMPLES

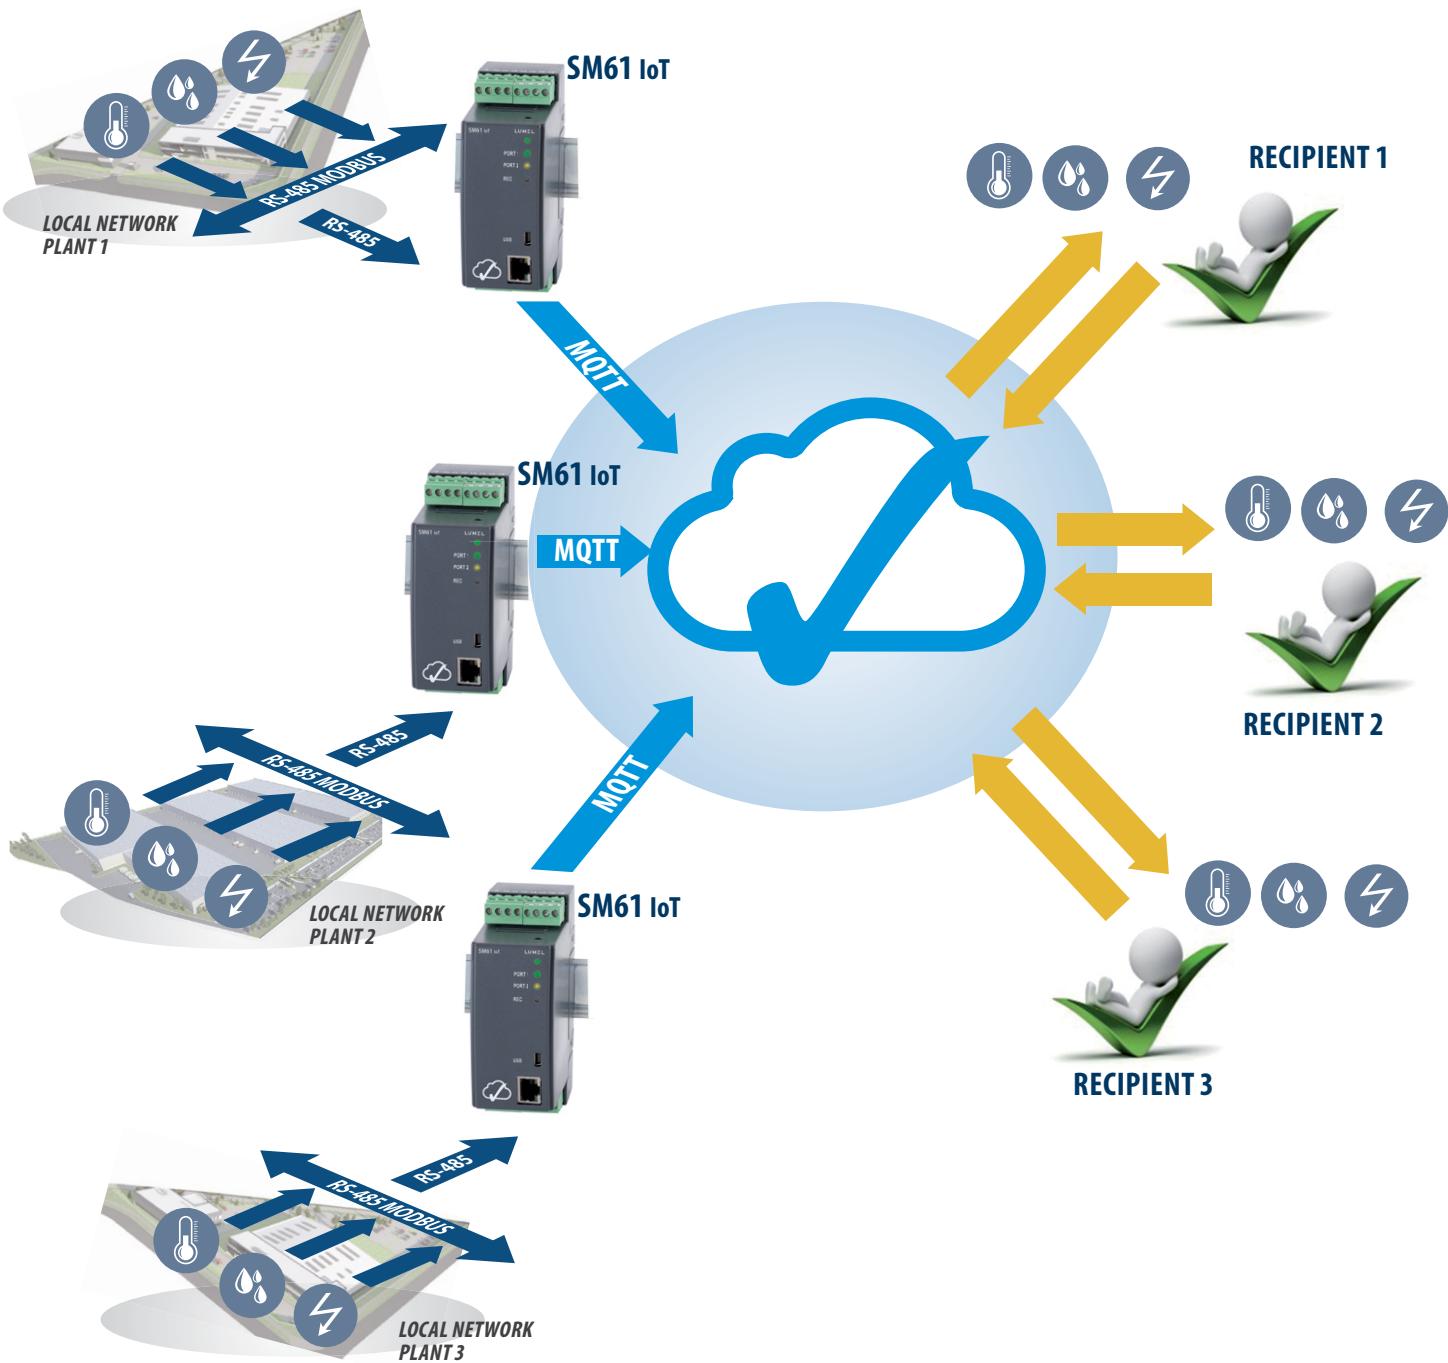

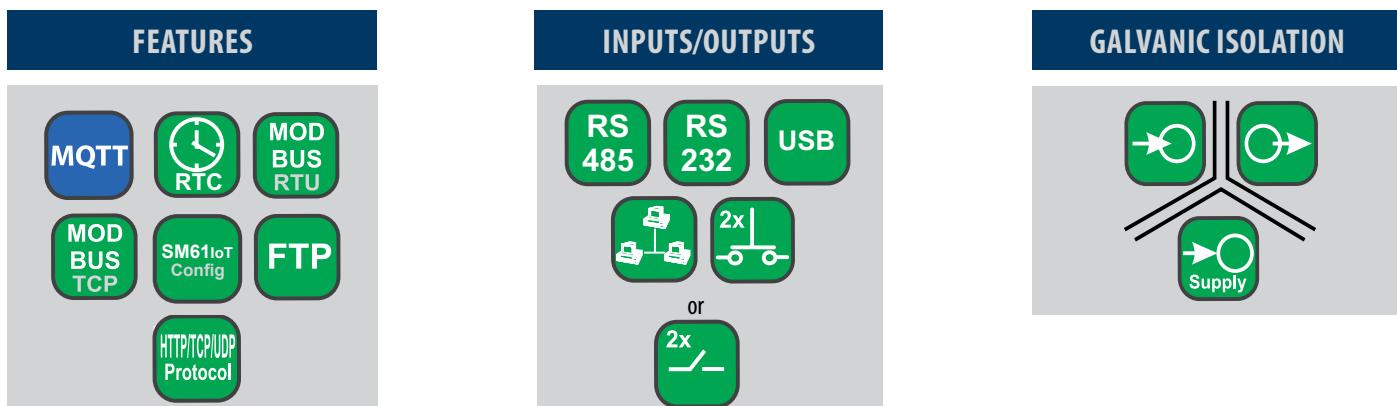

SM61 IoT CONFIGURATION

Channel number	Value number	Device address	Register address	Type	Name	Value	Add to the chart	Status
1	2	1	4000	float4x32i	Ummr_1	5.80 V	<input checked="" type="checkbox"/>	green
2	1	1	4002	float4x32i	Ummr_2	5.18 V	<input type="checkbox"/>	grey
3	2	1	4005	float4x32i	Irrms_1	2.20 mA	<input type="checkbox"/>	grey
3	1	1	4006	float4x32i	Irrms_2	2.20 mA	<input type="checkbox"/>	grey
4	1	1	4010	float4x32i	Irrms_3	1.89 mA	<input type="checkbox"/>	grey
4	2	1	4012	float4x32i	Irrms_4	1.89 mA	<input type="checkbox"/>	grey
5	1	1	4014	float4x32i	meterr_1	200.60 kWh	<input type="checkbox"/>	grey
5	2	1	4015	float4x32i	meterr_2	10.44 kWh	<input type="checkbox"/>	grey
4	1	1	4018	float4x32i	U_1	229.83 V	<input type="checkbox"/>	green
4	2	1	4020	float4x32i	I_2	4.53 A	<input type="checkbox"/>	green
5	1	1	4014	float4x32i	U_2	200.60 V	<input type="checkbox"/>	grey
5	2	1	4016	float4x32i	I_1	10.64 A	<input type="checkbox"/>	grey

Configuration web:

- configuration of IP settings and connection configuration of selected SM61 module,
- channels configuration of SM61 module,
- channels visualization of SM61 module.

TECHNICAL DATA

INTERFACE				
Interface	Port 1:RS-485, RS-232,	Port 2: RS-485	USB	Ethernet 10/100 Base-T
Function	communication with PC and HMI panels and other Master devices	communication with Slave devices	device configuration	device communication and configuration
Baud rate	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 bit/s		115200 bit/s	10, 100 Mbit/s
Information unit	1 start bit, 7 or 8 data bits, 1 odd/even parity bit, 1 or 2 stop bits	1 start bit, 8 data bits, 1 even parity bit, 1 stop bit		TCP/UDP
Transmission protocol	MODBUS RTU			MQTT, TCP/IP, HTTP, ICMP, DHCP, ARP, Modbus TCP
Remarks	max. cable lenght depends on the baud rate		max. cable lenght: up to 2 m	max. cable lenght: up to 100 m

EXTERNAL FEATURES

Weight	< 0.25 kg	
Overall dimensions	45 x 120 x 100 mm	
Protection grade (acc. to EN 60529)	from the housing side: IP40	from the terminal side: IP20
Fixing way	DIN rail 35 mm	


RATED OPERATING CONDITIONS

Supply voltage	20...24...40 V a.c., 20...24...60 V d.c. 10...16 V a.c., 10...20 V d.c. 85...230...253 V a.c., 90...300 V d.c.	power consumption: < 4 VA 40...50/60...440 Hz
Temperature	ambient: 0...23...55°C	storage: -20...70°C
Relative humidity	< 95%	condensation inadmissible
Operating position	any	
External magnetic field	< 400 A/m	

SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Pollution grade	2	acc. to EN 61010-1
Installation category	III	acc. to EN 61010-1
Maximal phase-to-earth operating voltage	<ul style="list-style-type: none"> • for supply circuits: 300 V • for other circuits: 50 V 	acc. to EN 61010-1

CONNECTION DIAGRAM

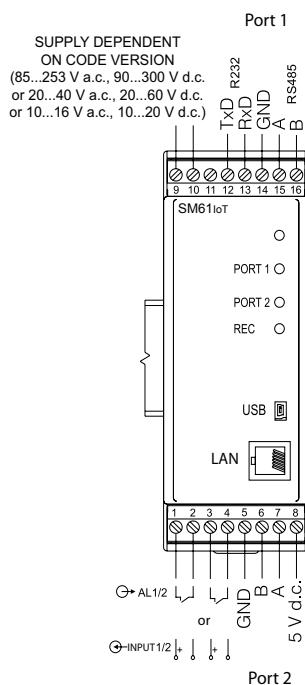

ORDERING CODE

SM61 IoT -	X	X	XX	X	X
Supply voltage:					
85...253 V a.c., 90...300 V d.c.	1				
20...40 V a.c., 20...60 V d.c.		2			
10...16 V a.c., 10...20 V d.c.		3			
Input/output:					
2 relay outputs	1				
2 binary outputs		2			
Version:					
standard version	00				
custom-made		XX			
language:					
Polish	P				
English	E				
other*	X				
Acceptance tests:					
without extra requirements	0				
with an extra quality inspection certificate		1			
acc. to customer's request			X		

Order example:

The code **SM61IoT - 1 2 00 E 1** means meter version with voltage supply 85...253 V a.c., 90...300 V d.c., with 2 binary inputs, standard version, user's manua in English, with an extra quality inspection certificate.

* - after agreeing with the manufacturer

For more information about LUMEL's products
please visit our website:

www.lumel.com.pl

Join us on Facebook!



SM61IoT-19_en



LUMEL
EVERYTHING COUNTS

LUMEL S.A.

ul. Sulechowska 1, 65-022 Zielona Góra, Poland
tel.: +48 68 45 75 100
www.lumel.com.pl

Export department:

tel.: (+48 68) 45 75 139, 45 75 233, 45 75 321, 45 75 386
e-mail: export@lumel.com.pl