


Data sheet Product LA 10 150 24





Cooling aggregates>Cooling aggregates with axial fan
 160 x 83 mm, with axial fan

Features

width:	160 mm
height:	83 mm
length:	150 mm
thermal resistance:	0.2 - 0.055 K/W
surface:	• raw degreased aluminium (by the metre raw aluminium) • mounting area(s) milled flat
operating voltage of the fan motor:	• 24 V DC • 230 V AC

Technical Drawing

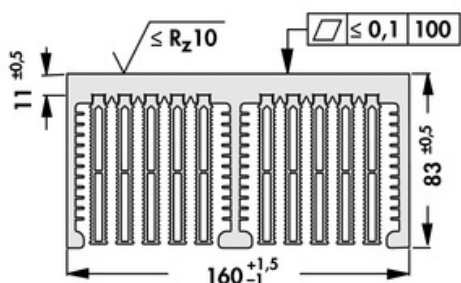

Fan

ebmpapst, kugellagert, 24 V DC

type:	ebmpapst 8314H
dimensions:	80x80x32 mm
tension:	24 V DC
power inout:	6 W
max. air volume:	80 m ³ /h
temperature range:	-20°C... 75°C
speed:	5,000 min ⁻¹
noise level:	48 dB(A)
weight:	170 g
failure rate (L ₁₀):	L ₁₀ < 55,000 h (40°C)

ebmpapst, kugellagert, 230 V AC

type:	ebmpapst 8556N
dimensions:	80x80x38 mm
tension:	230 V AC
power inout:	12 W
max. air volume:	50 m ³ /h
temperature range:	-40°C... +90°C
speed:	2,800 min ⁻¹
noise level:	31 dB(A)
weight:	490 g
failure rate (L ₁₀):	L ₁₀ < 52,500 h (40°C)