


((

MW-MLD-2835-3R-LENS



Professional Led Modules; **8-20cm** 3D letters, lightboxes

■ Features:



• for indoor and outdoor use

• 40 pcs in chain



TECHNICAL DETAILS


















TECHNICAL DETAILS	0.72W 100 07 18 III WARRANIY 3000011 PVVVI
MODEL	MW-MLD-2835-3R-LENS
Supply voltage	12V DC
Power consumption per module	0.72W
Chain power consumption	28.8W
Current consumption per module	60mA
LED diodes	San`an led - 2835
Quantity of LEDs	3
Light color	Red (620nm)
Luminous flux	18lm
Luminous flux density	84lm / W
Color rendering index - CRI	-
Beam angle	160°
Current stabilization	Yes
Dimming	Yes
Module dimensions (L x W x H)	63 x 15 x 6mm
Cable length	112mm
Number of modules in 1m	5.7
Box weight	21kg
Packing	Chain – 40pcs / Bag – 160pcs / Box – 2560pcs
Montage	Adhesive tape / mounting screw
Lifetime	L70B50 > 50000h
Working temperature	-25°C ÷ 55°C
IP protection	IP67
Warranty	5 years



MW-MLD-2835-3R-LENS



Professional Led Modules; **8-20cm** 3D letters, lightboxes

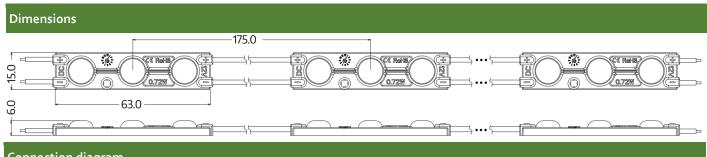

Connection diagram

One-side power input:

Two-side power input:





Maximum number of modules 40 pcs

Maximum number of modules 80 pcs

It is acceptable to connect multiple chains in parallel, as long as the power supply provides sufficient power

Beam angle

