

#### TECHNICAL DATA

##### BASIC DATA

Rated voltage	6	V
20hr capacity at end voltage 1,75V/cell at 25°C	7,2	Ah
Internal resistance (fully charged battery) at 25°C	12	mΩ

##### DIMENSIONS

Length	151(±1)	mm
Width	34(±1)	mm
Height	94(±1)	mm
(Height with terminals)	100(±1)	mm
Weight	1,2	kg

##### TERMINALS

WIRE	T1/T2
------	-------

##### OPERATION TEMPERATURE RANGE

Storage	-15°C to +40°C
Charge	-15°C to +40°C
Discharge	-15°C to +50°C

##### STORAGE

Selfdischarge after 3 months at 20°C	10	%
Selfdischarge after 6 months at 20°C	20	%
Selfdischarge after 12 months at 20°C	40	%

##### CASE MATERIAL

Standard	ABS (UL.94:HB)
Flame retardant	ABS (UL94:V0)

##### CHARGE VOLTAGE

Float charge at 25°C	6,75 V ± 0,30 V
Cycle charge at 25°C	7,20 V ± 0,60 V

##### CHARGE CURRENT

Recommended	0,72	A
Maximum	2,1	A

##### MAX. DISCHARGE CURRENT

5 sec.	105	A
--------	-----	---

##### DESIGNED LIFE

Bpower designed life at 25°C	up to 5	years
At 20°C according to Eurobat - General Purpose group	6 - 9	years

##### CYCLE LIFE

At 100% D.O.D.	200	cycles
At 50% D.O.D.	500	cycles

#### PHOTO

#### APPLICATIONS

- Uninterruptible Power Supplies (UPS)
- Telecommunication PABX
- Cash registers and fiscal printers
- Emergency lighting systems
- Emergency and fire systems
- Measure and mobile equipment
- Lawn mowers and electric bikes
- Toys

#### SAFETY



#### DISCHARGE CHARACTERISTICS

##### • Constant current (Current [A], 25 [°C])


$\frac{F.V.}{V_{cell}}$	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	23,5	16,2	12,5	6,61	3,98	2,05	1,63	1,30	1,11	0,650	0,341
1,80	26,4	17,0	13,1	6,92	4,13	2,14	1,69	1,37	1,16	0,680	0,357
1,75	28,1	18,2	13,6	7,14	4,25	2,21	1,75	1,42	1,23	0,721	0,377
1,70	29,7	18,6	13,9	7,30	4,36	2,27	1,80	1,45	1,25	0,728	0,382
1,65	31,3	19,1	14,2	7,45	4,42	2,32	1,84	1,47	1,27	0,737	0,387
1,60	32,6	19,8	14,5	7,61	4,48	2,35	1,87	1,49	1,28	0,747	0,392

##### • Constant power (Power [W/cell], 25 [°C])


$\frac{F.V.}{V_{cell}}$	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	45,2	30,7	24,5	13,0	8,43	4,21	3,27	2,87	2,47	1,45	0,694
1,80	50,3	32,2	25,5	13,7	8,73	4,39	3,45	3,01	2,54	1,50	0,718
1,75	52,7	33,7	26,2	14,1	8,97	4,63	3,60	3,10	2,63	1,53	0,737
1,70	54,8	34,8	26,8	14,5	9,15	5,22	3,73	3,15	2,68	1,55	0,750
1,65	56,7	36,2	27,5	14,7	9,30	5,32	3,82	3,20	2,72	1,56	0,760
1,60	58,2	37,2	28,2	14,9	9,45	5,40	3,87	3,23	2,73	1,57	0,770

F.V. - Final Voltage


#### DIMENSIONS/TERMINALS

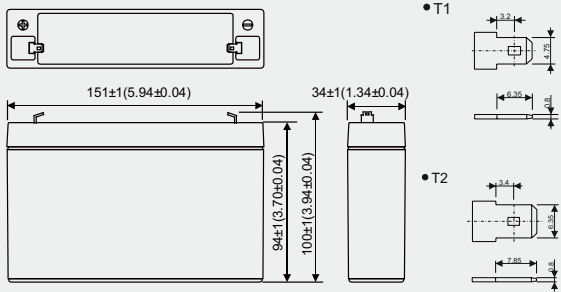


#### DISCHARGE CHARACTERISTICS

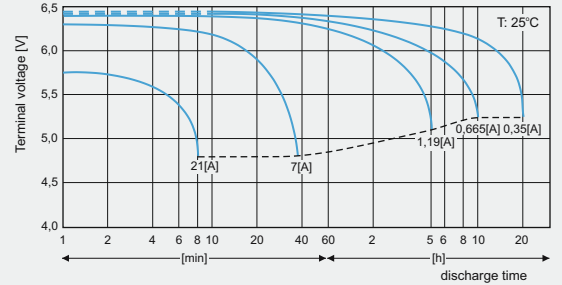


#### CHARGE CHARACTERISTICS

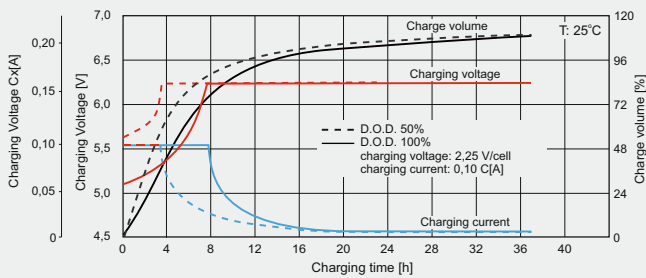


#### FLOAT LIFE

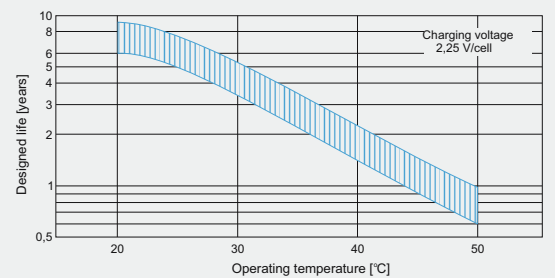


#### CYCLIC LIFE

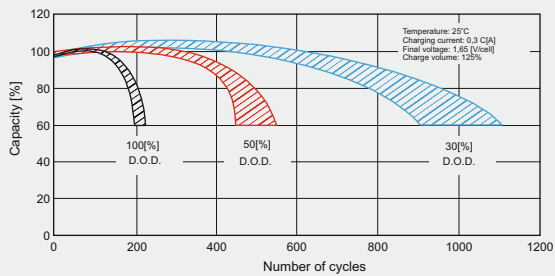

#### CAPACITY VS. TEMPERATURE

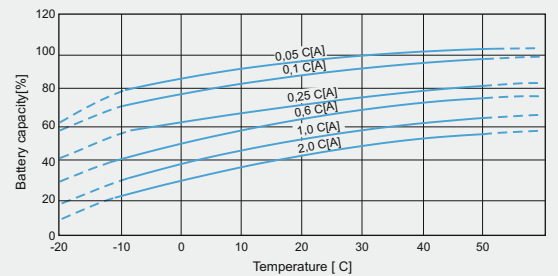

#### SELFDISCHARGE CHARACTERISTICS

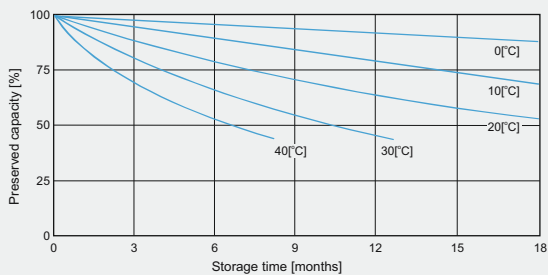

#### ENVIRONMENTAL INFORMATION

EXPLOITED BATTERIES ARE CONSIDERED AS HAZARDOUS WASTE. THESE WASTES DUE TO THEIR ORIGIN, CHEMICAL COMPOSITION (THEY CONTAINS HEAVY METALS LIKE LEAD AND OTHER TOXIC SUBSTATIONS) AND OTHER FEATURES MAY BE DANGEROUS FOR ENVIRONMENT AND HUMAN OR ANIMAL HEALTH AND LIFE.