HQS-9.6W-120LED-W-12V

Professional Led Strip, 9.6 W/m

MW LIGHTING®

POS

6500K **WHITE**

■ **Features:**

- *Double copper layer*

- *Can be cut every segment 2.5 cm*

- *3 years warranty*

IP33 | CRI>80 | 120° lens | UKCA | CE | 3 year warranty

TECHNICAL DETAILS

MODEL	HQS-9.6W-120LED-W-12V
Supply voltage	12V ± 0.5Vdc
Power	9.6W/m (48W/reel)
Current	0.8 A/m (4A/roll)
Power per reel	48W
Color temperature	6500K
Beam angle	120°
Luminous flux	1100 lm/m (5050lm/roll)
CRI	>80
Maximum length for one sided supply	5m
IP protection degree	IP33
Working temperature	-25°C ÷ 50°C
Storage temperature	-30°C ÷ 60°C
LED QTY	120 LEDs/m (600 LEDs/reel)
Width PCB	8mm
Cut section	25mm
Connection wire	2 x AWG20 (0.52 mm2) stranded wire, length = 140 mm: V+: red: V-:black.
Dimensions (L x W x H)	5000 x 8 x 1.2 mm
Packing	5m / reel (bag)

ENERG⚡

MW LIGHTING
HQS-9.6W-120LED-W-12V

A
B
C
D
E
F
G

F
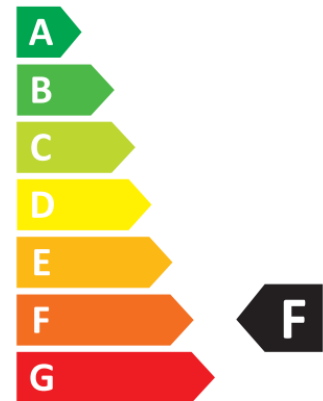
5 kWh/1000h

2019/2015

MECHANICAL SPECIFICATION:

5000±10mm

8.00

25.00

1.2

byTokic